

Model:UT-8851

USB to TTL converter

Datasheet

1. Overview

UT-8851 is a universal USB/TTL converter, no external power supply, compatible with USB and TTL standards, capable of converting single-ended USB signals to TTL signals, TTL terminal through the connection of the terminal block. The converter comes with zero delay automatic transceiver conversion inside, unique I/O circuitry automatically controls the data flow direction without any handshaking signal (such as RTS, DTR, etc.) No jumper setting is required to achieve TTL mode conversion, plug-and-play. Ensures suitability for all existing communication software and interface hardware.

UT-8851 interface converter can provide reliable connection for point to point communication, data communication rate 300-921600bps, with power indicator and data flow indicator, supported communication methods are USB to TTL conversion.

2. Major Functions & Features

- Support USB to TTL converter USB V2.0

3. Technical Parameters

- Standard: Compliant with USB1.1, 1.0 standard, backward compatible with USB2.0, compatible with TTL TIA/EIA standard
- USB signals: VCC, DATA-, DATA+, GND, FG
- TTL signal: TXD, RXD, GND
- Operating mode: Asynchronous operation, point-to-point communication
- Direction control: Automatic data flow control technology is used to automatically identify and control the direction of data transmission.
- Baud rate: 300-921600bps, automatic detection of serial signal rate
- Load capacity: Support point to point, each converter can be allowed to connect one TTL interface device
- Transmission distance: 5 meters for TTL and no more than 5 meters for USB
- Interface form: USB end Class A interface male, TTL end 5Pin terminal block
- Signal indication: three signal indicators power (PWR) transmit (TXD) receive (RXD)
- Transmission medium: twisted pair or shielded wire
- Dimension: 62mmx33mmx16mm
- Operating temperature: -40 ~ 85°C
- Relative humidity from 5 ~ 95%
- Support Win8/Win10/Win2000/2003/2008/2012/XP/Vista/7/8/8.1/10/CE/Mac/Linux etc.

4. Interface assignment

- TTL output signal and terminal pin assignment

Terminal block	Output signal	TTL Output signal
1	TXD	Transmit
2	RXD	Receive
3	N/C	/
4	VCC	+5V/200mA Output
5	GND	GND

- USB-A class: USB signal input and pin assignment diagram




- | | |
|--------------|--------------|
| 1、 VCC | 3、 DATA+(DP) |
| 2、 DATA-(DM) | 4、 GND |

5. Product View (Appearance)



6. Structure Dimensions

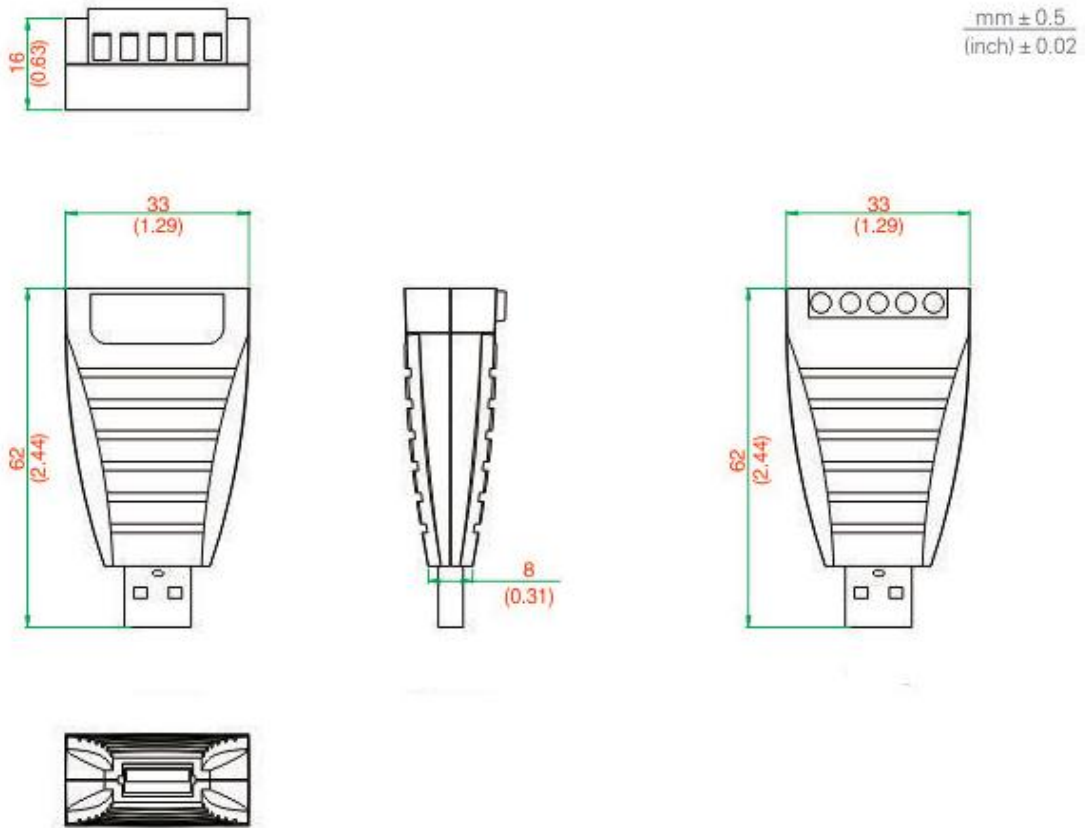

7. Ordering Information

Model	Signal/Port				Protection		Baud rate	Environment			Power	
	USB	RS-232	RS-485/422	TTL				Temperature		Humidity		
	USB A male	DB9 male	Terminal block		RS-232	RS-485/422		-25~70°C	-40~85°C	5~95°C	Port-powered	External power
UT-8851	√			√			300bps-921.6kbps		√	√	√	