

100M Network Fiber Optic Transceiver



Datasheet

UT-2571

1-Port 100M Network Fiber Optic Transceiver



- Adopt high quality optoelectronic integrated modules to provide good optical and electrical characteristics, ensure reliable data transmission and long lifecycle
- Supports full-duplex and half-duplex, auto negotiation
- Auto-10/100Mbps
- Fully automatic recognition of network interface
- Plug and play for easy access
- Input voltage:12/24/48VDC(10.8~52.8VDC), supports reverse polarity protection
- Support various fiber optic interfaces(SC/ST/FC/SFP)



OVERVIEW

UT-2571 series is a 100 M network fiber optic transceiver, providing one 10/100Base-TX Ethernet ports and one 100Base-FX optical port; it is used for Ethernet port and optical cable data communication, it is suitable for the scenarios of intelligent community or FTTH(fiber to the home).The series of products support -20 ~ 75 °C operating temperature and good EMC performance to ensure normal operation in harsh environments, the series will greatly extend the distance of network transmission, can easily achieve the interconnection between the main board server, repeater, hub, terminal and terminal, for video surveillance, finance, education and other industries to build a network to provide cost-effective, safe and reliable solutions.

SPECIFICATION

Protocol Standards

IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX & 100Base-FX

Interfaces

Fiber interfaces: 1*100Base-FX (SC/FC/ST)

RJ45 interface: 1*10/100Base-TX, auto detection, full/half-duplex, auto MDI/MDI-X

Switching Performance

Forwarding Rate: 148,810pps

Transmission mode: store and forward

MAC address size: 1K

Cache size: 448Kb

Backplane bandwidth: 1.6G

Power Requirement

Voltage input: 12/24/48VDC(10.8~52.8VDC)

Power consumption: 100mA@24Vmax

Terminal block: One pluggable 3-pin terminal block

Overload protection: Support

Reversal protection: Support

Mechanical Characteristics

IP protection level: IP40

Installation: DIN-Rail Mounted

LED indicator light

PWR, FDX,

Index parameters		Technical Parameters				
		Multimode (MM)	Single mode (SM)			
Optical characteristics	Dual fiber emission wavelength	1310	1310	1310	1550	
		Send wavelength	1310	1310	1310	1490
	Send single fiber (Type T)	nm	1550	1550	1550	1550
		Receive wavelength	nm	1310	1310	1490
Receive single fiber (Type R)	Send wavelength	1550	1550	1550	1550	
	Receive wavelength	nm	1310	1310	1310	1490
Transmission distance km		2	20	40	80	
Transmit power dBm		-15~-8	-15~-8	-5~0	-5~0	
Receive sensitivity dBm(≦)		-32	-34	-34	-34	
Light saturation dBm		-3	-3	-3	-3	
Optical loss dBm/km		0.5	0.5	0.3	0.25	

For example: UT-2571RSM-SC-40, "R" is receiving single fiber, "SM" is single mode,

"SC" fiber interface type is SC head, "40" transmission km for 40km

Fiber core diameter:

Mechanical Dimension

Dimension (W x H x D): 100mm x 80mm x 35mm

Weight: 0.45Kg

Packaging dimension: 180mm x 140mm x 45mm

Operating Environment

Operating temperature: -20 ~ 75°C

Storage temperature: -40 ~ 85°C

Relative humidity: 0 ~ 95%

Industrial Standards

EMI:

FCC Part 15 Subpart B classA, EN55022 class A

EMS:

IEC(EN)61000-4-2(ESD)

IEC(EN)61000-4-3(RS)


IEC(EN)61000-4-4(EFT)

IEC(EN)61000-4-5(Surge)

IEC(EN)61000-4-6(CS)

IEC(EN)61000-4-8

IEC 60068-2-27(Shock)

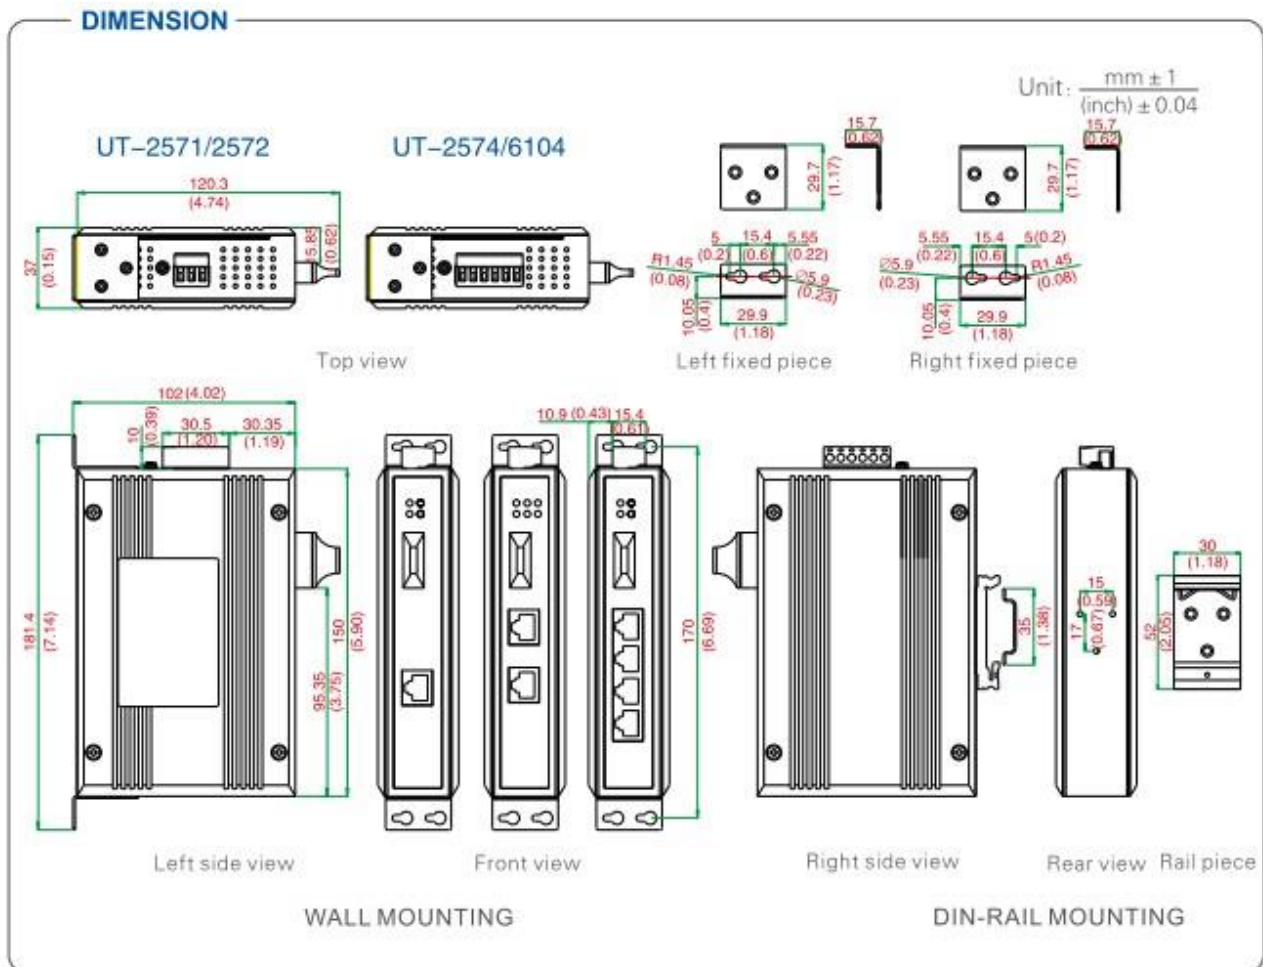

ORDERING

Model	Interface		Optical port description
	10/100Base-TX	100Base-FX	
UT-2571SM-SC	1	1	Single-mode dual-fiber SC
UT-2571SM-ST	1	1	Single-mode dual-fiber ST
UT-2571SM-FC	1	1	Single-mode dual-fiber FC
UT-2571MM-SC	1	1	Multi-mode dual-Fiber SC
UT-2571MM-ST	1	1	Multi-mode dual-Fiber ST
UT-2571MM-FC	1	1	Multi-mode dual-Fiber FC
UT-2571P	1	1	SFP